

Sound and space
Integrated speaker systems



REVOX

Dominating Entertainment.
Revox of Switzerland.



Guiding lights.

Re:sound I series – Z40/60

From a world of lighting to a world of sound.

Revox meets Zumtobel

For decades, Revox has been characterised by more than just the development of audio components with excellent sound qualities. They have also developed innovative ways of integrating these components into buildings to create exclusive living ambiances. With two new speakers from the Re:sound I series, the developers have taken a further significant step: high-quality speakers with excellent sound can now be integrated into the elegant housings from the European property lighting specialists, Zumtobel.

To look at and to listen to

This symbiosis of light and sound has been achieved with the 2LIGHT and 2LIGHT MINI light range from Zumtobel. Equipped with Revox speakers, the majestic downlight system still gives a pleasingly uncluttered look to the ceiling and floods each room with an atmospheric, brilliant light. The Z40 or Z60 speakers fit seamlessly into the 2LIGHT range. The result is effectively a concealed sound solution, which nevertheless, delivers incredible power in terms of the richness and complexity of the sound.

Spatial sound in the smallest space

With its newly conceived 40 watt broadband speaker and at only 127 x 127 mm, the Z40 already offers a strikingly differentiated sound experience for the Zumtobel 2LIGHT MINI system. Complemented by a flexible subwoofer positioned in the room, the extremely compact sound-converters satisfy even the most demanding requirements. The significantly more generously proportioned housing of the 2LIGHT product correspondingly offers substantially more capacity for the fine Revox sound. Designed as 2-way speakers that pack 60 watts of power, the Z60 speakers produce a fascinating, powerful and warm sound picture.



Re:sound I Z40, version in titanium



Re:sound I Z60, version in white

Restrained for the eye, full sound for the ear.

Re:sound I series

The build-in speaker.



Discrete design

You also want to enjoy the first class sound of your Revox system in the kitchen, the bathroom or on the terrace without having to place additional speakers? With the Re:sound I series, we have created a speaker series that combines awesome sound with the greatest visual discretion. The high quality sound converters can be integrated seamlessly into any room design and the sound impresses through its stunning presence and richness, in equal measure.



True Revox: The sound

In spite of the optimised dimensions, the Re:sound I series delivers an amazing sound. The 130 – 205 mm low midrangers provide powerful lower frequencies so that in most cases, additional bass speakers are unnecessary. The result is a brilliant, space-filling sound without any visible technology imposing itself on the room. With the Re:sound I in ceiling 80 stereo speaker, a high quality stereo sound is possible with just one speaker when space is at a premium. Problem-free and simple installation is guaranteed thanks to the low-profile build-in depth of all I series speakers.

Invisible Interface


All Re:sound I speakers can optionally be equipped with the Re:connect M204 infrared receiver. The receiver that is completely concealed behind the metal grille allows the system to be controlled in situ by remote control, even when the amplifier is in a different room. This means that speakers from the I series not only give you an elegant sound solution, they also provide an invisible interface to your stereo system at the same time.



A system for the whole house.

Revox Multiroom System

Smart Entertainment.

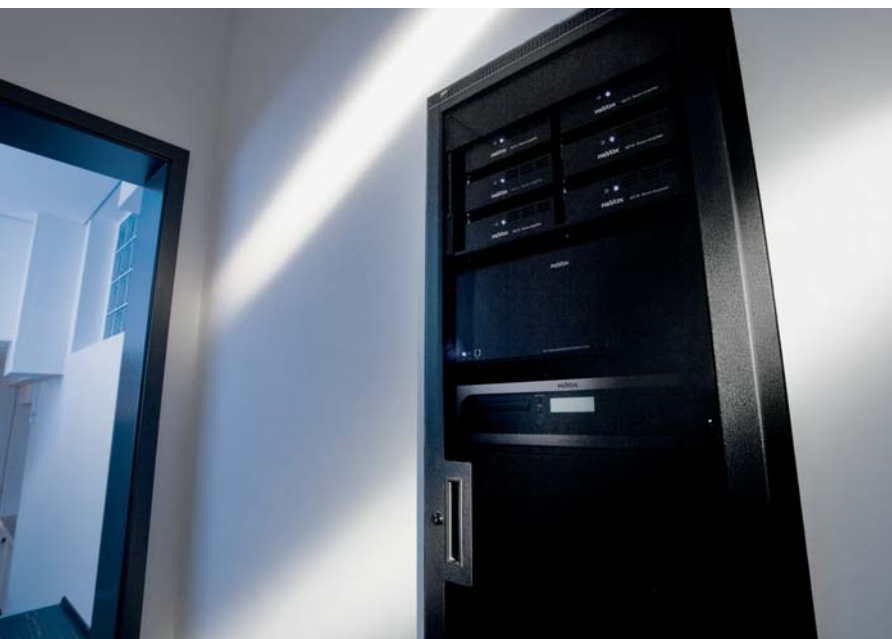

Intelligent living

In the future, controllable functions such as lighting, air conditioning, the opening and closing of windows, doors, shutters or blinds and last but not least, the complete range of information and entertainment media will be net-worked in such a way that your home will become a "Smart Home". Daily functional processes will be controlled centrally and adjusted and adapted to the actual requirement of the residents. This will make the houses and apartments of the future safer, more energy efficient and more comfortable. With the Re:system M10/M51 source management, we are presenting an innovative contribution to the intelligent living of the future.

A system for all seasons

The heart and the control centre of the Revox Multiroom system is a Re:system M51 or M10 source management. Using just one of the Revox multiroom controllers, up to 32 rooms in 4 separate zones can be supplied with music. There is a wide range of comfortable solutions available for the external control of the system – whether via remote control, wall-mounted control or PC, operation always follows the same intuitive and simple logic. Usually, the press of a single button is enough and the system fulfils your wishes.

Open to all wishes


The modular construction of the system guarantees the perfect matching of all system components. Experience in the main room with your M51 the outstanding sound quality of a CD. Or enjoy a spontaneous playlist from the M37 audio server in the bath. With the subtle wall-mounted control units, your choice is made very easy. And when you want to change your selection? No problem. The Revox Multiroom system has been designed so consistently for sustainability that an enhancement or a module swap is possible at any time.

Reduced to the maximum

The M10 source management has a strictly functional look and disappears, along with the other control units of your "Smart Home", behind an unassuming looking door to the utility room. Its 19" rack housing offers space for up to 10 Re:source modules and, therefore, a high level of intelligence and flexibility. Extensive connection options are available for controlling the system. This guarantees that the communication between your Revox system and your building management system will work seamlessly. In this respect, we are working very closely together with the leading suppliers, Gira and Feller.

Re:sound I


Re:sound I Z40 loudspeaker



Fullrange Speaker
Outer dimensions 127 x 127 mm
Cutout dimensions 110 x 110 mm
Installation depth 100 mm
Weight 1,1 kg

Power Rating	40 Watt
Music power handling capacity	60 Watt
Impedance	4 Ohm
Frequency response	105 Hz – 18 kHz
Efficiency (1W/1m)	87 dB
Fullrange system	80 mm
Temperature range	from -10° to +70° C


Re:sound I Z60 loudspeaker



2 way inwall speaker system
Outer dimensions 231 x 231 mm
Cutout dimensions 218 x 218 mm
Installation depth 150 mm
Weight 3,8 kg

Power Rating	60 Watt
Music power handling capacity	80 Watt
Impedance	8 Ohm
Frequency response	48 Hz – 20 kHz
Efficiency (1W/1m)	87 dB
Woofer/Midrange	116 mm
Tweeter	10 mm dome type
Temperature range	from -10° to +70° C


Re:sound I inwall 65 Loudspeaker



2 way inwall speaker system
Outer dimensions 218 mm x 305 mm
Installation depth 76 mm
Cutout dimensions 272 mm x 187 mm
Weight 1,7 kg

Power Rating	65 Watt
Music power handling capacity	90 Watt
Impedance	6 Ohm
Frequency response	38 Hz – 23 kHz
Efficiency (1W/1m)	89 dB
Woofer/Midrange	167 mm
Tweeter	25 mm dome type

Re:sound I inceiling 50 loudspeaker




2 way inwall speaker system
Outer dimensions 202 mm
Cutout diameter 165 mm
Installation depth 75 mm
Weight 1,2 kg

Power Rating	50 Watt
Music power handling capacity	70 Watt
Impedance	6 Ohm
Frequency response	50 Hz – 20 kHz* / 60 Hz – 20 kHz**
Efficiency (1W/1m)	88 dB
Woofer/Midrange	130 mm
Tweeter	12 mm dome type

* within ceiling / ** with Revox cabinet

Re:sound I inceiling 80 loudspeaker




2 way inwall speaker system,
directable tweeter
Outer diameter 273 mm
Cutout diameter 238 mm
Installation depth 95 mm
Weight 2,0 kg

Power Rating	80 Watt
Music power handling capacity	110 Watt
Impedance	6 Ohm
Frequency response	32 Hz – 20 kHz* / 48Hz – 20 kHz**
Efficiency (1W/1m)	90 dB
Woofer/Midrange	205 mm
Tweeter	25 mm dome type

* within ceiling / ** with Revox cabinet

Re:sound I inceiling 80 stereo loudspeaker



Double 2 way inwall speaker
system, directable tweeter
Outer diameter 273 mm
Cutout diameter 238 mm
Installation depth 95 mm
Weight 2,1 kg

Power Rating	2 x 40 Watt
Music power handling capacity	2 x 60 Watt
Impedance	2 x 6 Ohm
Frequency response	32 Hz – 20 kHz* / 48Hz – 20 kHz**
Efficiency (1W/1m)	95 dB
Woofer/Midrange	205 mm
Tweeter	2 x 25 mm dome type

* within ceiling / ** with Revox cabinet

REVOX

Dominating Entertainment.
Revox of Switzerland.

Revox GmbH

Am Krebsgraben 15, D 78048 VS-Villingen

Tel.: +49 7721 8704 0

info@revox.de

www.revox.de

Revox AG (Schweiz)

Wehntalerstrasse 190, CH 8105 Regensdorf

Tel.: +41 44 871 66 11

info@revox.ch

www.revox.ch

Revox Handels GmbH

Josef-Pirchl-Strasse 38, AT 6370 Kitzbühel

Tel.: +43 5356 66 299

info@revox.at

www.revox.at

Subject to colour deviations and printing errors caused by the photo and typographical execution, as well as changes to the construction and execution.

